

MYCENTER® HX800G/1000




HORIZONTAL MACHINING CENTER

SIMPLIFY THE COMPLICATED

HX800G/1000 Extreme capacity,


Designed for high-power, high-pr

- World's fastest 60m/min (2,362ipm) rapid feedrates on Solid Box Ways
- Largest work envelope in its class
Ø1,525mm x 1,550mm (60.0" x 61.0" H)
- Patented twin ballscrew and dual feedback technology in X, Y, Z axes with Heidenhain scale feedback
- Standard 62T (field expandable) fixed pot ATC can be expanded in the field up to 212 tools
- Powerful 53HP, 4-step gear driven, 12,000min⁻¹ spindle. 8,000min⁻¹ and HSK spindle configurations are available options
- Standard full 4th axis rotary table with Heidenhain high resolution rotary scale. Easy part set-up and high level accuracies - 10 arc/sec positioning, 3 arc/sec repeatability.

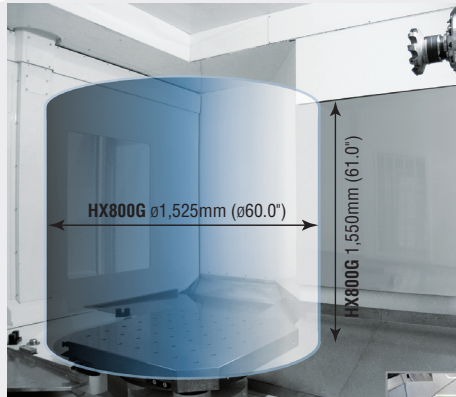

The Mycenter-HX800G/1000 is designed to handle your largest part machining requirements.

It easily handles workpieces up to Ø1,525 (Ø60.0") x 1,550mm (61.0") H. The HX800G/1000 has a table load capacity of 3,000kg (6,600Lbs). Standard full 4th axis for easier set-up of more complex parts.

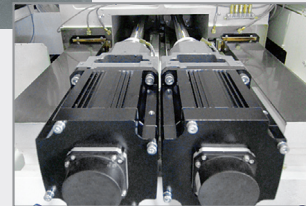

Patented Twin Ballscrew & dual feedback technology since 1999 provides the stability to support and move large, heavy masses at higher speeds.



Quick Pull Down Menu


- 67 Million pulse encoder technology with up to 8,192 block look-ahead processing speeds
- Software upgrades throughout the life of the control
- Completely customizable and expandable user experience
- Video Guidance and visual programming screens
- Anywhere-Remote® E-Mail status updates

Arumatik®-Mi


Pioneering Icon CNC Operation




Customizable Icon Screen. Advanced touch screen capabilities with user customized main menu touch screen and a variety of visual programming screens and functions that offer the operator faster and easier methods of part set-up and processing.



Maintenance Support Function. Kitamura's Maintenance Support Function offers operator convenience in displaying methods of machining maintenance, repair and parts support on the NC Screen.



Our high efficiency **Intelligent Advanced Control System (IAC)** consists of a series of strategically located sensors and machine efficiency monitors that work to keep component growth due to machining heat build-up to less than ± 5 microns (± 0.0002 ").

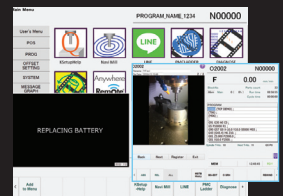

Video Guidance. Useful functions visually walk the user through methods of battery replacement, alarm release, APC recovery, PMC ladder and alarm release / guidance making it easier to monitor machine performance and uptime.

Positioning Accuracy ± 0.002 mm (± 0.000079 ") / Full Stroke

Repeatability ± 0.001 mm (± 0.000039 ")


World renowned JAPANESE

power and performance for extreme parts


precision cutting of supersize work

Kitamura castings provide critical design benefits:

- Premium grade Meehanite cast iron
- Solid column construction
- Hand-scraped surfaces for absolute perfect fit with no gaps
- Solid Induction Hardened Boxways produced at our factory in Japan
- Zero overhang for guaranteed static accuracies of $\pm 0.002\text{mm}$ ($\pm 0.000079''$) / full stroke

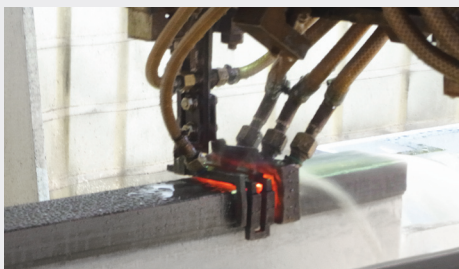

Induction hardened solid box guideways with linear scale feedback on all axes with twin ballscrew design in X & Y axes.

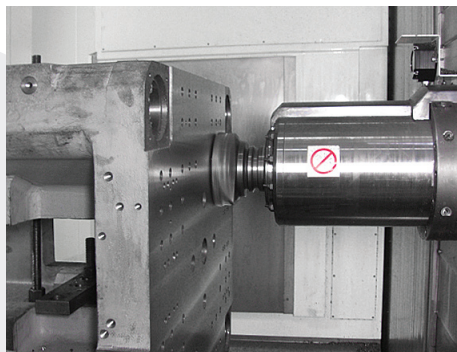

With Power to handle the toughest cutting conditions the Mycenter-HX8000G/1000 features a 53HP, high-torque, 4-step gear driven spindle that delivers high-efficiency cutting performance with low energy consumption. 8,000min⁻¹ and 12,000min⁻¹ configurations are available.

Exceptional Chip Management


Double decker style chip conveyor with 100 micron filtration, internal chip augers and wash and shower coolant quickly eliminates chips, improving accuracy, surface finish and tool life.



Available Options



Spindle and Tool Probes

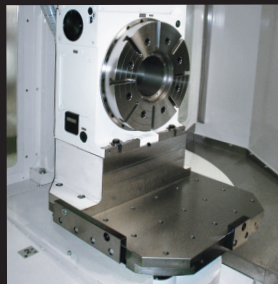

Field Retrofittable 5th Axis Rotary Tables (available on both pallets)




Up to 1000psi Coolant Thru the Spindle Available

Engineered Plastic			
Series C Series	F1000	0%	
Series D Series	F1000	0%	
Series E Series	F1000	0%	
Series F Series	F1000	0%	
Series G Series	F1000	0%	
Series H Series	F1000	0%	
Series I Series	F1000	0%	
Series J Series	F1000	0%	
Series K Series	F1000	0%	
Series L Series	F1000	0%	
Series M Series	F1000	0%	
Series N Series	F1000	0%	
Series O Series	F1000	0%	
Series P Series	F1000	0%	
Series Q Series	F1000	0%	
Series R Series	F1000	0%	
Series S Series	F1000	0%	
Series T Series	F1000	0%	
Series U Series	F1000	0%	
Series V Series	F1000	0%	
Series W Series	F1000	0%	
Series X Series	F1000	0%	
Series Y Series	F1000	0%	
Series Z Series	F1000	0%	

- Machine Monitoring Software Suite
- MTConnect Ready Adaptor



Field Expandable Multi-Pallet System

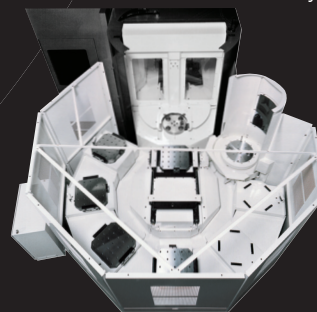

design, engineering and manufacture since 1933

SPECIFICATIONS Mycenter-HX800G/1000

Table

Table Size	800 x 800mm (31.5" x 31.5")
Table Indexing	0.001 Degree (4th Axis)
Tapped Hole (Size x Qty.)	M16 x 2.0 x 49
Max. Table Load	3,000kg (6,600 lbs.) *With Limitations
Max. Workpiece Dia.	Ø1,525mm (Ø60.0")
Max. Workpiece Height	1,550mm (61.0")

Travels

X-Axis Travel	1,550mm (61.0") / Twin Ballscrew Design
Y-Axis Travel	1,300mm (51.2") / Twin Ballscrew Design
Z-Axis Travel	1,400mm (55.1") / Twin Ballscrew Design
B-Axis Travel	0 to 360 Degrees Full 4th Axis
Table Surf. to Spindle Center	100 ~ 1,400mm (3.9" ~ 55.1")
Table Center to Spindle Nose	150 ~ 1,550mm (5.9" ~ 61.0")

Spindle

Spindle Taper	#50 NST (HSK-A100 Opt.)
Spindle Speed	35 ~ 12,000min ⁻¹ (8,000min ⁻¹ Opt.)
Drive Method	Gear Drive, 4 Step
Maximum Spindle Torque	585.9 N•m (432.1 ft•lbs)
Spindle Motor	40kW (53HP AC/15 min) 22kW (30HP AC/Cont.)

Feed

Rapid Feed X,Y,Z	60m/min (2,362ipm)
Cutting Feed Rate X,Y,Z	60m/min (2,362ipm)
Rapid Feed (B Axis)	9,000 deg/min (25min ⁻¹)

APC

Number of Pallets	2
APC Change Time	23.0 seconds

ATC

Tool Storage Capacity	62 Tools (Opt. 122, 162, 212)
Tool Selection Method	Random bi-directional, Fixed Pot
Tool Holder Style	CT (BT) 50
Max. Tool Dia. / Length	Ø125mm (Ø4.9") / Ø800mm (Ø31.5") w/Adjacent Tool Pots Empty Ø320mm (Ø12.5") / Ø650mm (Ø25.6")
Max. Tool Length	650mm (25.6")
Max. Tool Weight	35kg (77 lbs.) *With limitations
Tool to Tool	2.1 seconds
Chip to Chip	5.9 seconds, min.

Utilities

Power Requirement	70KVA, 200v AC, 3 Phase
Air Requirement	0.5 MPa, 410L/min (90psi, 14cfm)

Machine Dimensions

Required Space (W x D)	4,295 x 7,119mm (69.1" x 280.3")
Machine Height	4,264mm (167.9")
Machine Net Weight	28,400kg (62,480 lbs.)


Control

Arumatik-Mi


Specifications subject to change without notice.

FLOOR PLANS


Front View

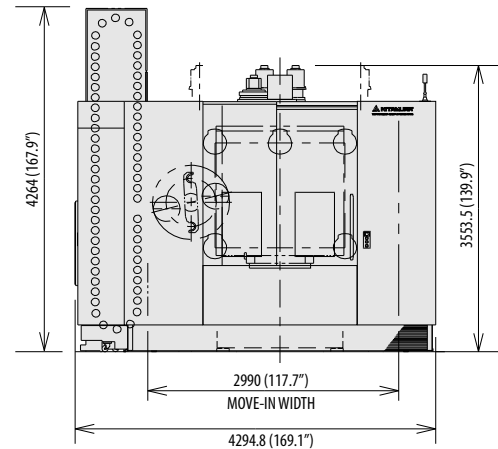

Side View

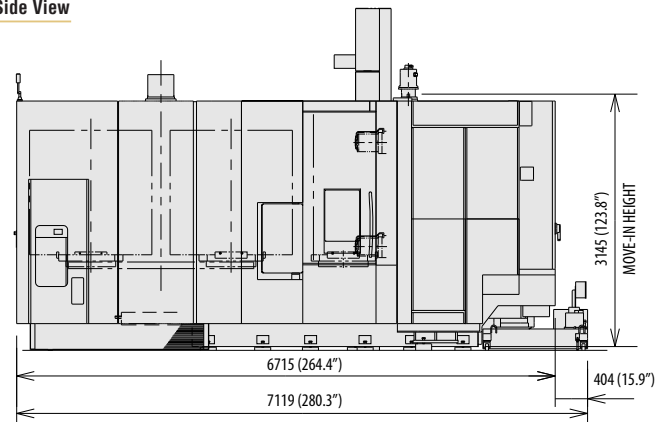

Layout View

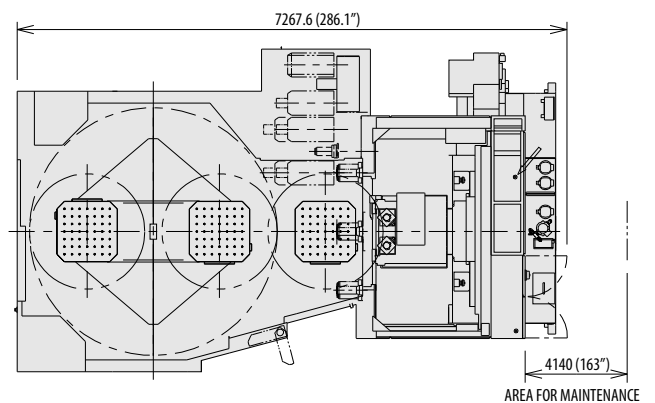

KITAMURA®
Machining Challenges-Simplified®

Kitamura Machinery of U.S.A., Inc.

451 Kingston Court, Mt. Prospect, IL 60056 +1 847 520 7755
kitamura-machinery.com info@kitamura-machinery.com

Kitamura Machinery Co., Ltd.

1870-Toide, Takaoka-City, Toyama Pref., Japan +81 766 63 1100
kitamura-machinery.co.jp mycenter@kitamura-machinery.co.jp

Kitamura Machinery GmbH (Europe)

Wahlerstrasse 39, 40472 Dusseldorf, Germany +49 211 657 9010
kitamura-machinery.eusales@kitamura-machinery.eu

PRINTED IN USA 11/22 REV 2